

Safety Precautions



CAUTION

- Do not install display in a wet environment or place anything on the top of the display filled with liquid, such as vase or beverage.
- Do not install near flammable objects, such as gasoline or other volatile liquids.
- Do not install near any heat sources such as radiators or other heating devices.
- Do not install in the dusty environment.
- Do not damage the power cord or plug.
- Do not disassemble the screen to avoid electric shock.
- The product can normally operate only under 2000m in altitude. In installations at altitudes above 2000m, some abnormalities may be experienced.



WARNING

- After extended use the heat sink behind the screen may be hot. Do not touch to avoid being burned.
- Do not touch the screen panel with sharp objects or extreme pressure to avoid damage to the panel.
- The display should be installed in well-ventilated place, do not install in a confined space.
- Do not drop or allow any object to fall to the screen.
- Do not touch the screen with wet hands to avoid electric shock.
- When cleaning, unplug the monitor. Use a soft, dry cloth to wipe the screen off. Do not use alcohol or other chemical liquids.
- If you smell smoke or hear a strange noise, immediately unplug the monitor and contact the vendor.
- Do not discard this product with general household waste. Please be sure to comply with the local waste regulations.
- Suitable for mounting on concrete or other non-combustible surface only.
- Please power off the LCD and the video source before plugging in the DVI cable.



IMAGE BURN-IN WARNING

- When a stationary or fixed image is displayed for a long time on the screen, the image may be permanently imprinted on the screen. This phenomenon is known as image burn-in and is not covered by the manufacturer's warranty.
- In order to avoid burn in, avoid prolonged display of static or fixed images on the screen.

V 1.00

Contents


Confirm the items below are included with the display. If any item is missing, please contact your dealer.

NOTE: The color and shape of the accessories may vary by product.


- DS491LT4 Professional LCD x1 pc
- Remote control x1 pc
- Batteries (1.5V / AAA) x2 pcs
- Power cable x1 pc
- Quick Start Guide x1 pc
- RS-232 cable x1 pc
- DVI cable x1 pc
- Ethernet crossover cable x1 pc

Mounting the Display

When used in the portrait orientation, the LCD should be rotated clockwise such that the left edge becomes the top edge.




A standard VESA wall mount may be used to secure the display to wall (purchased separately).

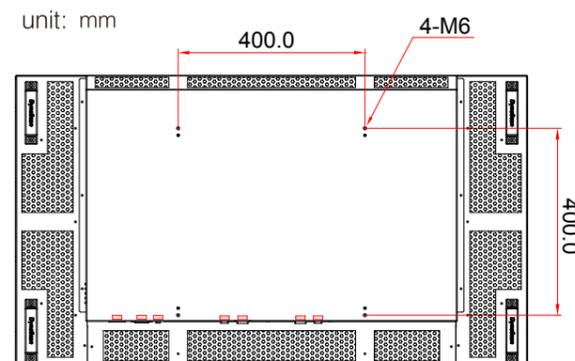


Powering On the Display

- 1 Connect the power cable to the AC-IN of display. Connect other end to 110-220 VAC power outlet.

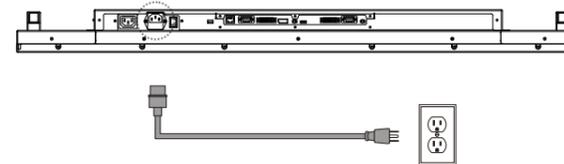


- 2 Switch ON the power switch on back of display.

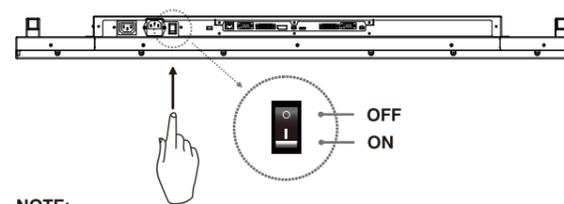

NOTE: The remote control only works when the mains switch is in the ON position.


Connecting a Video Source

- 1 Connect the DVI cable (or DP cable) to the DVI-IN port (or DP-IN port) on the back of the display.

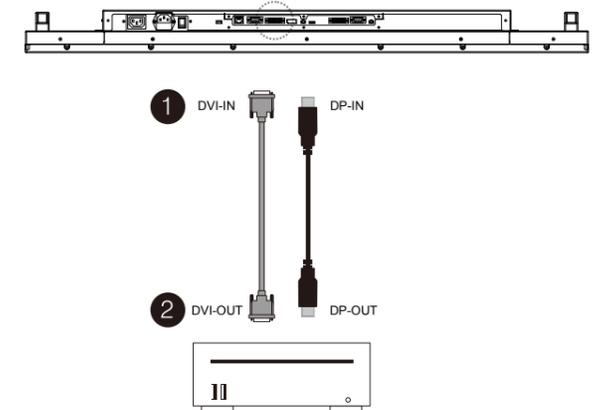

- 2 Connect the other end of the DVI cable (or DP cable) to the DVI-OUT port (or DP-OUT port) of your video source device.

Using the Remote

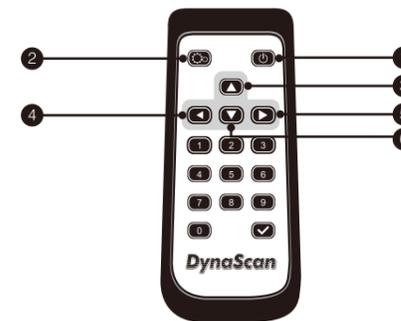

ITEM	DESCRIPTION
1	POWER Power On / Off
2	MENU OSD On / Off
3	UP Move the cursor up or change the setting of the selected item
4	LEFT Exit the current selection
5	RIGHT Select the highlighted item
6	DOWN Move the cursor down or change the setting of the selected item

Aiming the Remote

